



RJ45 10/100/1000 BASE-TX JACK /Dual USB Combo

FEATURES

- LAN interface suitable for 10/100/1000Base-TX applications
- RJ45/USB stacked design saves on PCB real estate
- USB module complies with USB 2.0 standards and meets CAT5 Fast Ethernet industry performance standard
- Magnetics are 100% electrically tested for HI-POT and continuity
- Meets or exceeds IEEE 802.3 and ANSI X3.263 standards including 350 μ H minimum OCL with 8 mA bias
- Recognized by UL 60950-1




ELECTRICAL SPECIFICATIONS @25°C-Operating temperature 0°C TO 70°C


Part Number	Data Rate	Turns Ratio		LEDs	Insertion Loss (dB MAX)	Return Loss (dB MIN)				Crosstalk (dB TYP)			Common Mode Rejection (dB TYP)		Hipot (Vrms) @60Hz
		TX	RX			1-100 MHz	1-30 MHz	30-60 MHz	60-80 MHz	1-10 MHz	32-60 MHz	60-100 MHz	1-50 MHz	50-100 MHz	
45F-10102DYD2	10/100	1CT:1	1CT:1CT	G-O/Y	-1.0	-18	-16	-12	-40	-35	-30	-30	-20	1500	
45F-10202GDD2	10/100/1000	1CT:1	1CT:1	G/G-O	-1.0	-18	-16	-12	-40	-40	-35	-30	-25	1500	

Mechanicals and Dimensions:

8 PIN

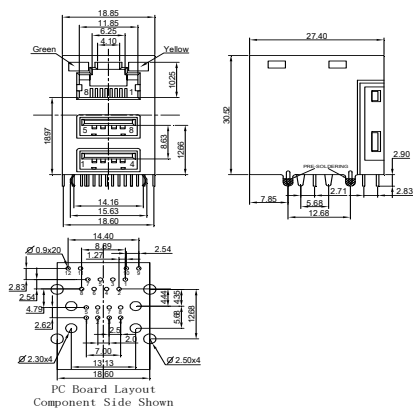


10 PIN

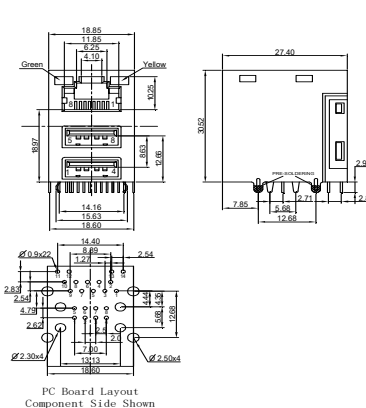


SCHEMATICS


45F-10101




45F-10102




45F-10103




45F-10104




45F-10201



45F-10203



45F-10204



45F-10207

