

FEATURES :

- Universal Input 80~264VAC
- Medical safety design refer to (2 X MOPP) according to ANSI/AAMI ES60601-1 and IEC/EN60601-1
- Suitable for BF application with appropriate system consideration
- No load power consumption<0.1W
- Extremely low leakage current
- EMI class B for class II configuration
- Protection: Short Circuit / Overload / Over Voltage / Over Temperature
- No minimum load required
- 3 Years Warranty
- ROHS Compliant

Applications:

- Portable medical device
- Mobile clinical workstation
- Medical computer monitor
- Medical examination instrument


YUAN DEAN SCIENTIFIC

**AC-DC Converter****GA5M SERIES****5Watt****4KVac Isolated****Single Output****2" x 1" Package Module****Notes:**

Ripple & noise is measured by using 20 MHz bandwidth, measured with a 47uf paralleled with a high-frequency 0.47uf capacitor across each output by full load.

Input Specifications

Parameters	Conditions	Min	Typ	Max	Units
Rated Input Voltage	Vo,Io nom		100~240		Vac
Voltage Range	Vo,Io nom	AC in	80	264	Vac
		DC in	105	370	Vdc
Line frequency	Vi nom,Io nom		47	50/60	Hz
Inrush Current	Io nom	Vi:115VAC		25	A
		Vi:230VAC		45	A
Input Current (Full load)		0.2A (115Vac)	0.1A (230Vac)		
Input Fuse	VDE/UL/CCC FUSE 2.5A/250V (Slow blow)				

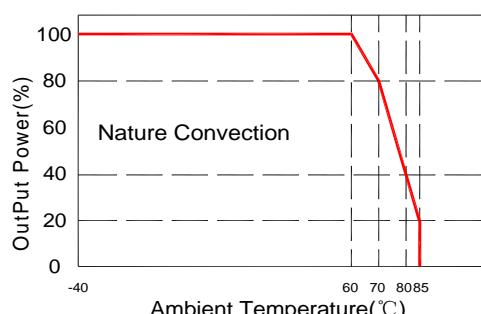**Temperature Derating Graph**www.yds.com.tw

TEL : 886-6-3842899 FAX : 886-6-3843288

E-MAIL : ydsweb@yds.com.tw

Rev:0 2017/10/05


Output Specifications					
Parameters	Conditions	Min	Typ	Max	Units
Output Voltage Accuracy	Vi nom, Io nom	5V Models		± 3	%
		12/15/24V Models		± 2	%
Minimum Load	Vi nom	0			%
Line Regulation	Io nom, Vi min...Vi max		± 0.3		%
Load Regulation	Vi nom, Io min...Io nom		± 0.5		%
Protection	Over load	Above 110% rated output power			
		Protection type: Recovers automatically after fault condition is removed			
	Short circuit	Recovers automatically after fault condition is removed			
	Over Voltage	110%-150% rated output Voltage			
		Protection type: Zener diode clamp			
	Over Temperature	Protection type: Shut down o/p voltage, recovers automatically after temperature goes down			

Part Number

GA5M - S 12
 A B C


A: Series
 B: Single Output
 C: Output Voltage

Output Derating VS Input Voltage

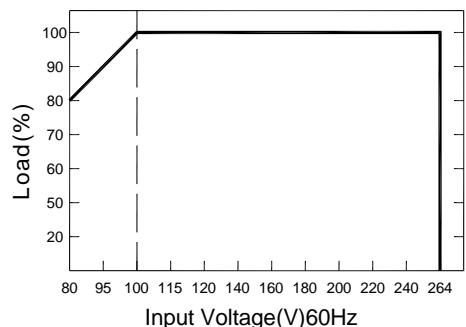


Parameters	Conditions	Min	Typ	Max	Units
Isolation Voltage	Input / Output		4KVac/ 5mA/60Secs		
Isolation Resistance	Input / Output, @500 Vdc	100			MΩ
Operating Temperature	Operating at Vi nom, Io nom	-40		+85	°C
Storage Temperature	Non Operational	-40		+100	°C
Relative Humidity	Vi nom, Io nom		95		% RH
Dimension		L50.80x W25.40 x H17.02mm			
Cooling	Free air convection				

General Specifications

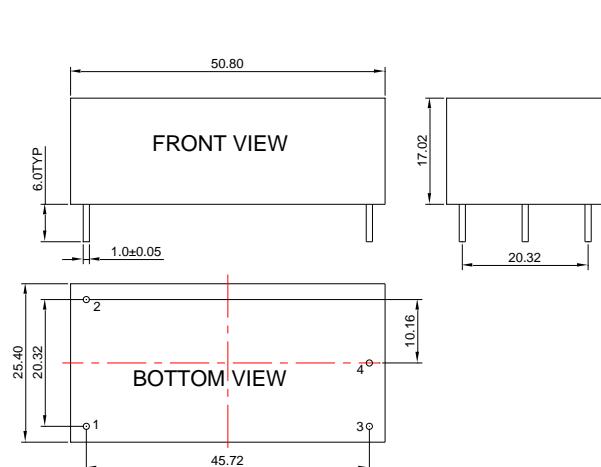

Unit : mm ,
 Unless otherwise specified, all tolerances are ± 0.50

Circuit Schematic

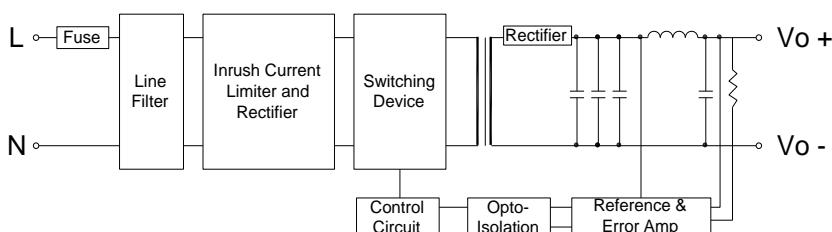

PIN Connection

PIN	1	2	3	4
GA5M	ACN	ACL	-Vo	+Vo

www.yds.com.tw



TEL : 886-6-3842899 FAX : 886-6-3843288
 E-MAIL : ydsweb@yds.com.tw

Rev:0 2017/10/05